Avvertenza:
Non installare l'asciugacapelli nel bagno o in altri ambienti esposti a umidità.

Modalità di installazione dell'unità con il cavo collegato alla presa:

1. Realizzare 2 fori con un diametro di 6 mm, rispettando le dimensioni riportate nella Figura 2, quindi inserire i tasselli nei fori e fissare il supporto nel foro superiore.
2. Allineare la clip di fissaggio nella base posteriore con il gancio di supporto e spingere saldamente, fissare la base anteriore e posteriore sulla parete utilizzando l'apposita vite e infine inserire il tassello nel foro della vite.
3. Collegare l'unità all'alimentazione generale e portare l'interruttore di accensione su "ON".



Figura 2

Modalità di installazione dell'unità senza cavo collegato

1. Ripetere la fase 1 sopra descritta.
2. Allentare le viti come illustrato nella Figura 3 per rimuovere la base anteriore, quindi rimuovere il cavo dal terminale.
3. Aprire il foro di ingresso del cavo: infilare il cavo di riserva dentro a questo foro. A questo punto, allineare la clip di fissaggio nella base posteriore con il gancio di supporto e spingere saldamente, fissare la base posteriore sulla parete utilizzando l'apposita vite (Figura 4).
4. Fissare il cavo di riserva al terminale, facendo attenzione alla direzione N.I. del cavo e riposizionare il terminale nella sua posizione originale (Figura 4).
5. Fissare la base anteriore dopo avere controllato di non avere fatto degli errori.
6. Collegare l'alimentazione generale e portare l'interruttore di accensione su "ON".



Figura 3

Figura 4

Modalità di installazione nel cassetto

1. Realizzare due fori con un diametro di 4 mm, rispettando le dimensioni riportate nella Figura 5.
2. Fissare la base dell'unità sul pannello inferiore del cassetto, utilizzando le apposite viti, come illustrato nella figura.
3. Collegare l'alimentazione generale e portare l'interruttore di accensione su "ON".



Figura 5


Figura 5

Grazie per avere acquistato uno dei nostri prodotti,

che siamo certi saprà soddisfare le sue esigenze.

Modalità di utilizzo
Collegare l'alimentazione generale e afferrare il corpo dell'asciugacapelli, che funzionerà quando viene premuto il pulsante a molla. Spostare il pulsante su o giù per regolare la temperatura di asciugatura:
MAX per produrre aria più calda, MIN per produrre aria tiepida.

Schema elettrico

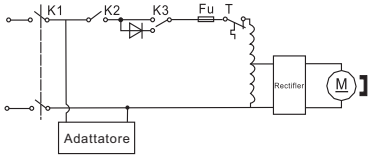

Componenti

1. Corpo dell'asciugacapelli
2. Pulsante a molla
3. Pulsante di accensione
4. Base anteriore
5. Presa per rasoio
6. Base posteriore



Figura 1

Note:
1. Assicurarsi che la tensione dell'asciugacapelli corrisponda alla tensione di alimentazione.
2. Attenersi alle istruzioni di sicurezza di seguito riportate durante l'uso dell'asciugacapelli. Non utilizzare l'asciugacapelli con le mani bagnate. Non tirare il cavo di riserva.
Non lasciare che persone inesperte utilizzino l'asciugacapelli, senza la dovuta supervisione.
3. Pulire e conservare correttamente l'asciugacapelli.
Estrarre la spina dalla presa elettrica durante la pulizia dell'asciugacapelli.
Fare attenzione per evitare che del liquido penetri nell'asciugacapelli.
Utilizzare una soluzione detergente a base di acqua e sapone per pulire il corpo dell'asciugacapelli, non utilizzare liquidi spray o sostanze abrasive.
Non siamo responsabili per eventuali danni causati dal mancato rispetto di tali istruzioni.

ASCIUGACAPELLI

Contenuto della confezione:

un'unità asciugacapelli, un manuale

Accessori:

un gancio di fissaggio,due viti,due tasselli

Caratteristiche

1. L'interruttore generale consente di spegnere l'apparecchio quando non viene utilizzato.

2. Due temperature di asciugatura.

3. Premere leggermente sul pulsante a molla per accendere e mettere in funzione l'apparecchio e rilasciarlo per spegnerlo.

Thank you very much for becoming a user of our products,which will bring convenience and pleasuer to you in coming days.

This series Wall Mounted Hair Dryer focuses on safely,convenience and power-saving with modern streamline shape,shows smart combination of Scientifics and aesthetics, It s installation method is amazing because it can be installed both in drawer and on wall, It's a ideal choice for hair-drying in hotel and family.

Features:

1.Characterized with a general power switch to allow this unit be power off when is not in using
2.Two heatings
3.Slightly press on the spring button to turn on and work, release that switch to turn off.

Components:

1.Dryer Body
2.Spring button
3.Swift switch
4.Front Cover
5.Shaver Socket
6.Back Cover



Picture 1

Warning:Don't install the hair dryer in bathroom and other places easy wet.

How to install this unit with plug connected wire:

1.Drill2 holes of 6mm diameter according to the dimension shown in picture 2 then insert toggle into that holes and fix its hanger to top hole.



Picture 2

2.Align installation cilp on the back cover to the hanger and push down,fix front and back cover on wall with the screw, then insert toggle into screw hole.

3.Connect with general power and move power switch to "ON" position.

How to install this unit without plug-connected wire:

1.As per first step of the method above.

2.Loosen the screws as per picture 3 to remove front cover and remove to plug-connected wire from terminal.



Picture 3

3. Open the wire entry hole;pull the reserved wire through that hole. Then align installation clip on the back cover to the hanger and push down ,fix back cover on wall with the screw(picture4).

4.Fix the reserved wire on terminal,please notice its direction of N,L wrie,replace terminal to its original position (picture4).

5.Fix front cover after checking that there is no mistake.

6.Turn on general power and move power switch to "ON" position.

How to install in drawer:

1.Drill two holes of 4 diameter according to dimentsion shown in pictuer 5.

2.Fix the base of this unit on bottom board of drawer with the screws as per pictuer6.

3.Turn on general power and move power switch to "ON" position.



Picture 4



Picture 5


Picture 6

How to use:

Switch on gengal power and pick up the dryer body,the dryer will work when the spring button is held on,move the push button up and down for higher or lower heating. "MAX" for hot heating. "MIN" for warm heating.

Electricity Diagram



Notes:

1. Ensure the voltage of hair dryer is same with the power supply.
2. Please follow the below safety frameworks when you operate the hair dryer.Don't operate the hair dryer when your hands are wet.Don't pull out the combined cord,Don't let the man who don't know how to operate the hair dryer operate it alone except monitored by man.
3. Clean and keep hair dryer
   Please pull out the power plug from electrical outlet when you cleaning the hair dryer.Please pay attention the hair dryer to avoid absorbing in the inlet of hair dryer.Please use the cleaning solution of water with soap to clean the housing of hair dryer,don't use spray liquid or abrasive. We don't responsible for any danger things if you don't follow the above instructions.

Parts in the package:
one set hair dryer one manual

Accessories:
one pothook two piece of screws two piece of goggles

HAIR DRYER